




TYPICAL HORIZONTAL FORMWORK

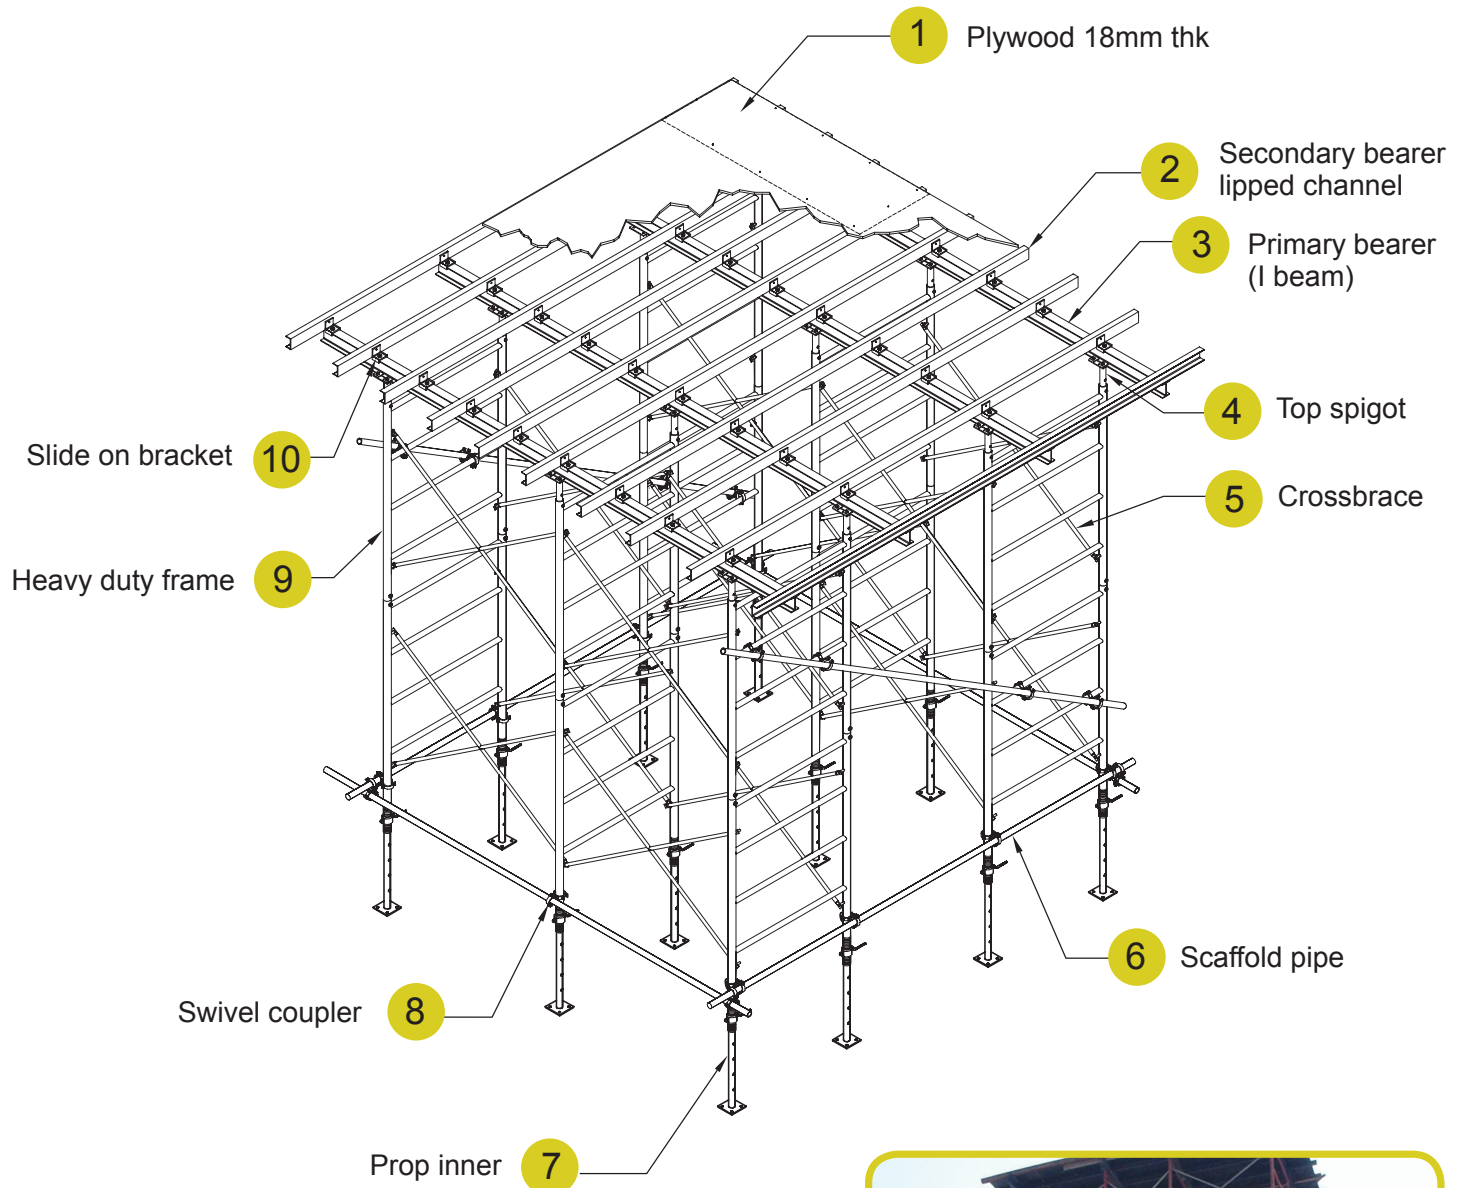


ADVANTAGES OF TABLEFORM

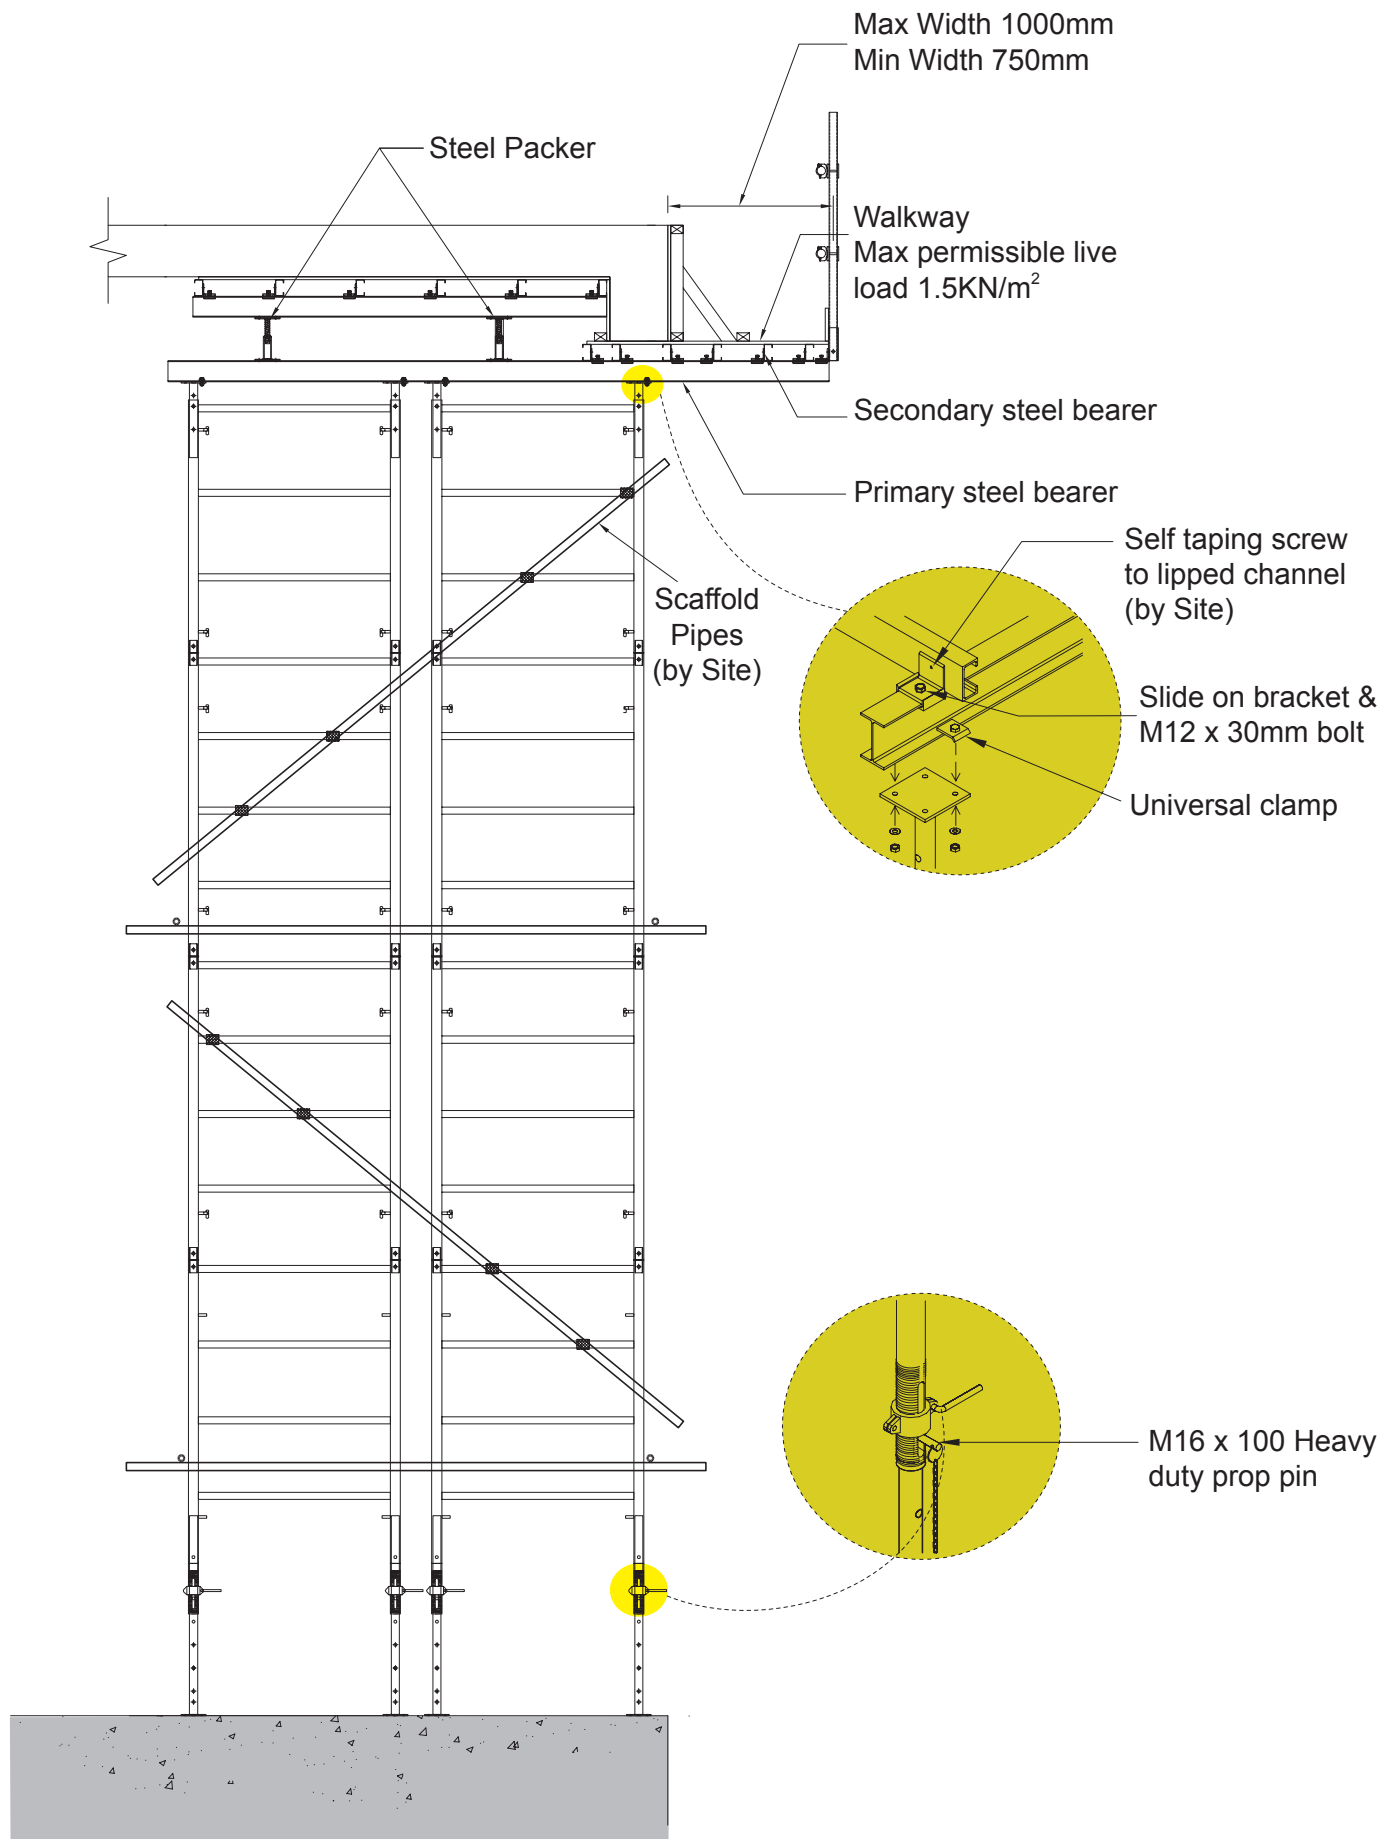

HEAVY DUTY SUPPORT WORK

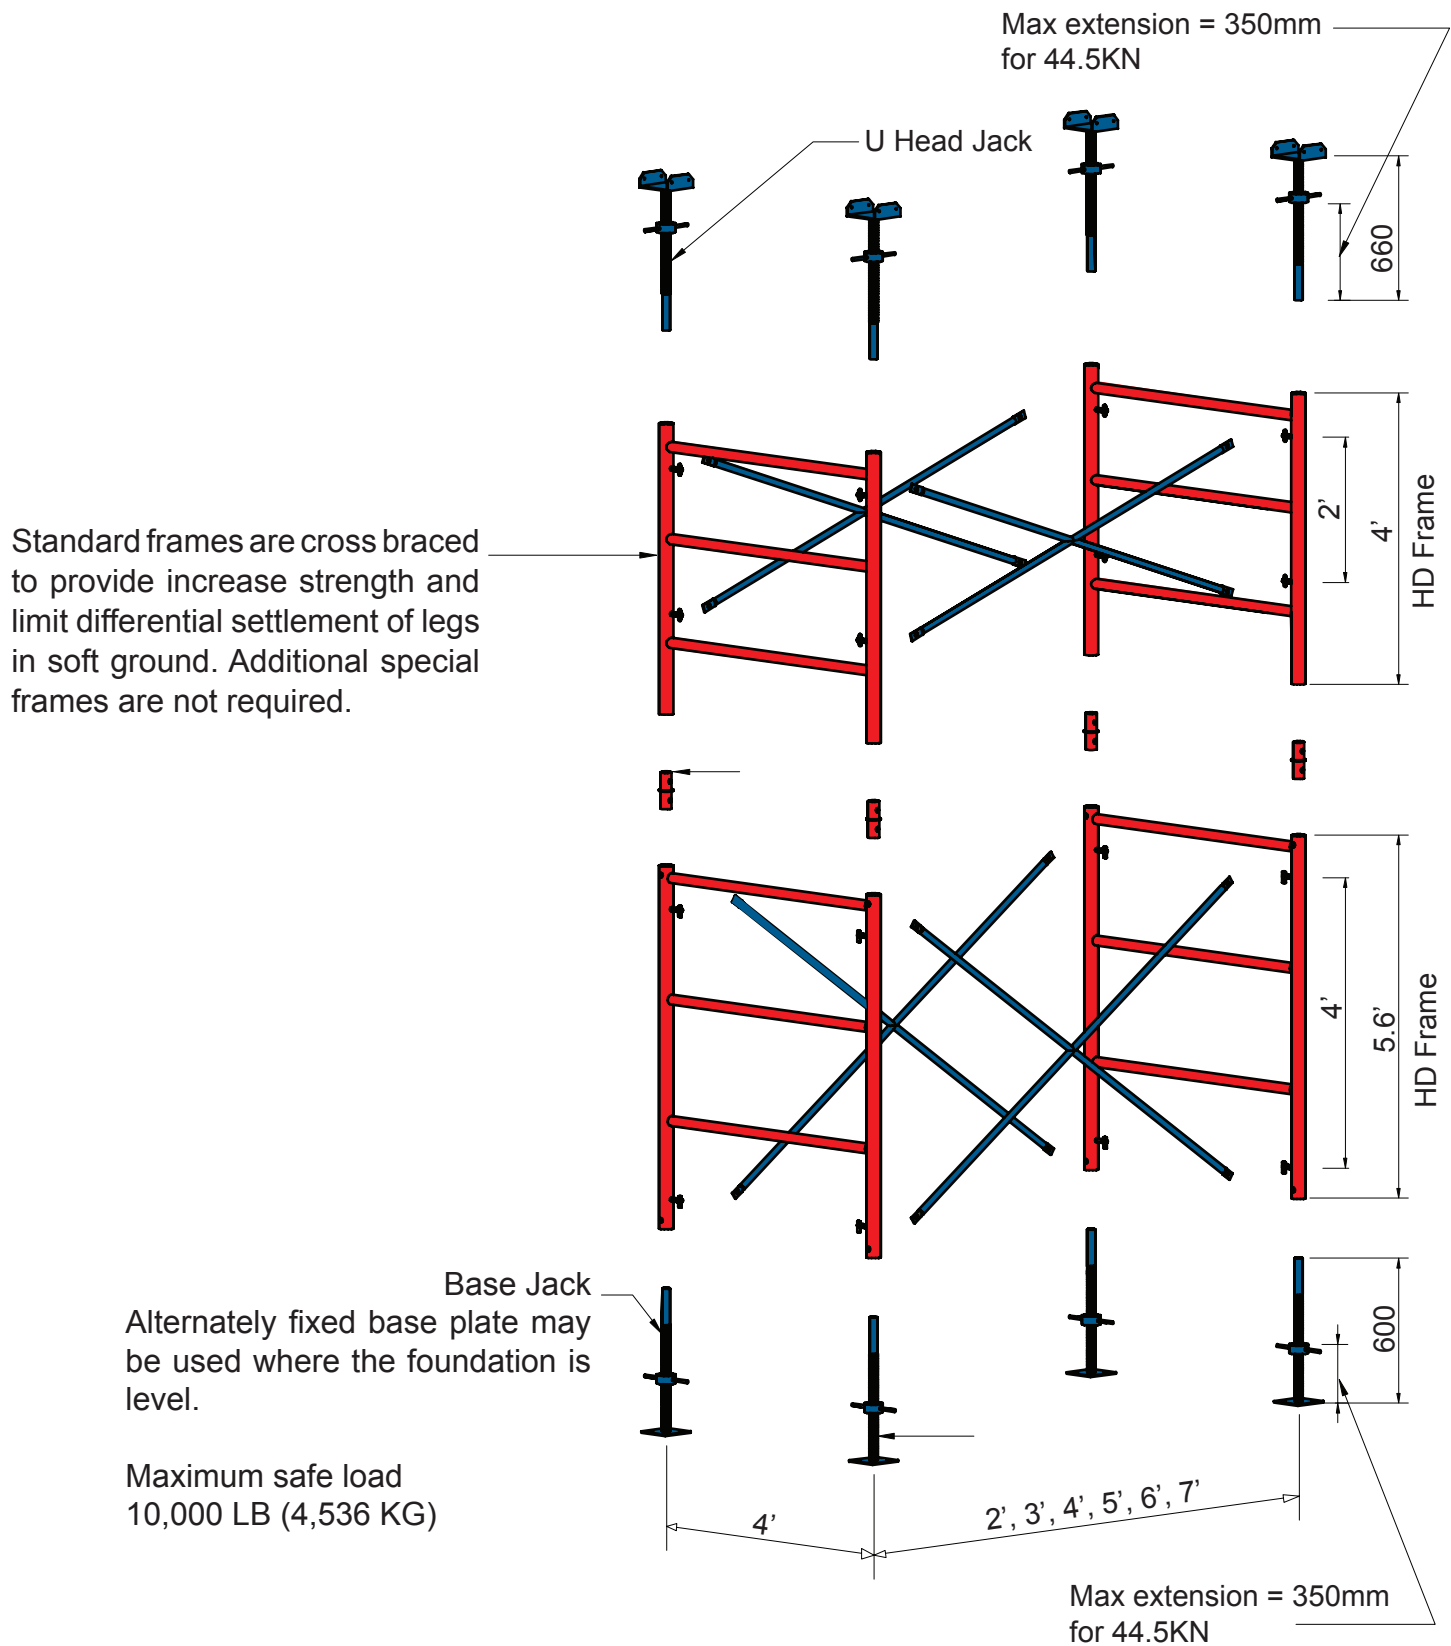

HORIZONTAL FORMWORK

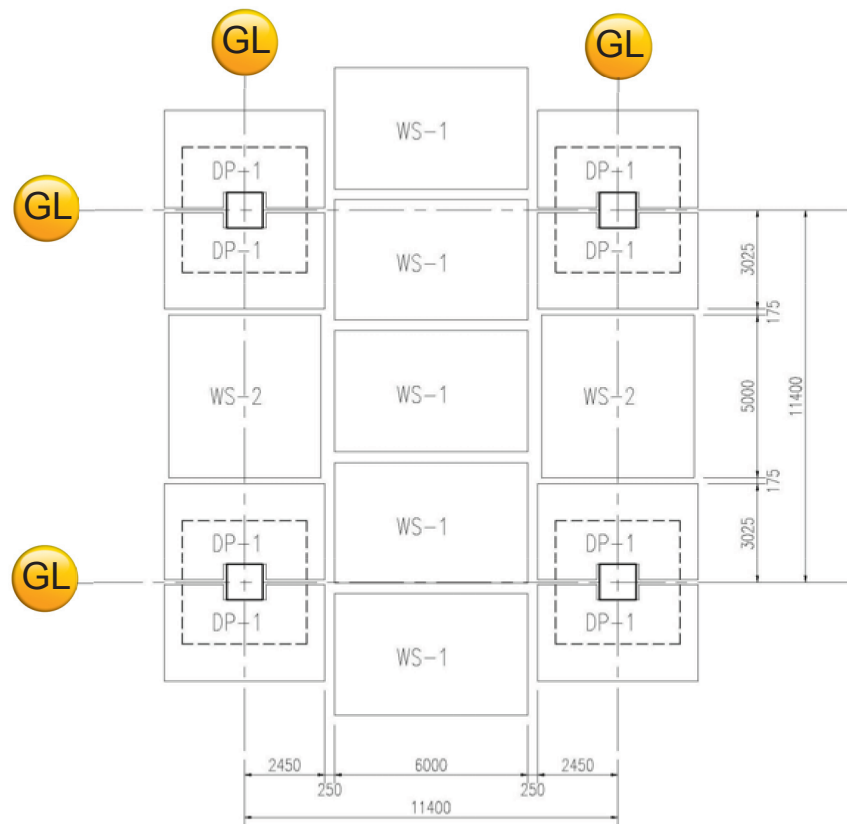

A typical flat slab/capital design shows clearly the requirement of only two types of tableform to be used for typical bay.



Tableform using steel primaries and steel secondaries.




Steel packers are used in tableform for difference in thickness between flat slab and capital to reduce convention timber box-out.



Using standard components such as heavy duty frames, prop frames, steel primary and secondary bearers virtually assures just about any height and size configuration required and on a limited number of re-uses assures the contractor of the most cost efficient system.

TRANSFERRING OF TABLEFORM

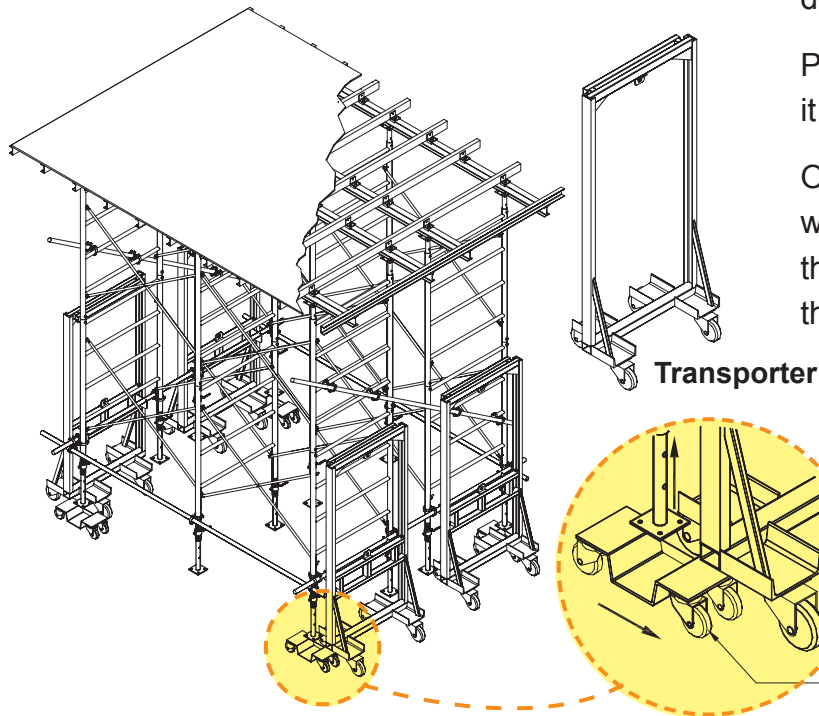


Lower the table slightly to break the bond of the concrete by turning the prop collar downward(approx. 50mm).

Push transporter into position and set until it supports the tableform.


Once transporter carries the tableform weight, release the prop inner by taking out the prop pins and pushing the prop inner into the frame.

STAGE - 1

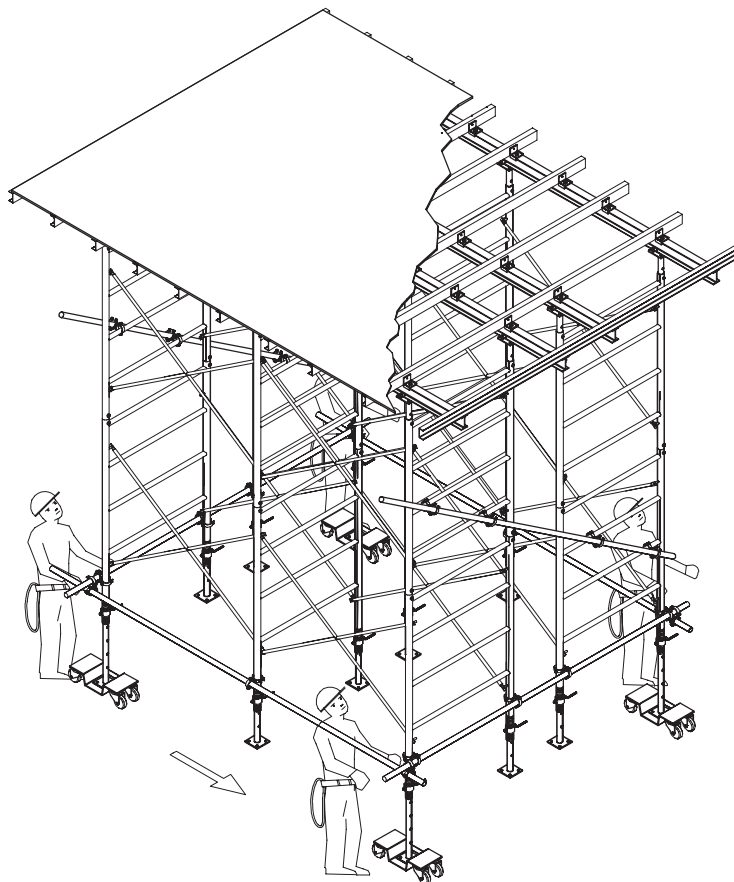


The transporter can then be removed once the tableform rests on the transporter wheel (trolleys).


STAGE - 3

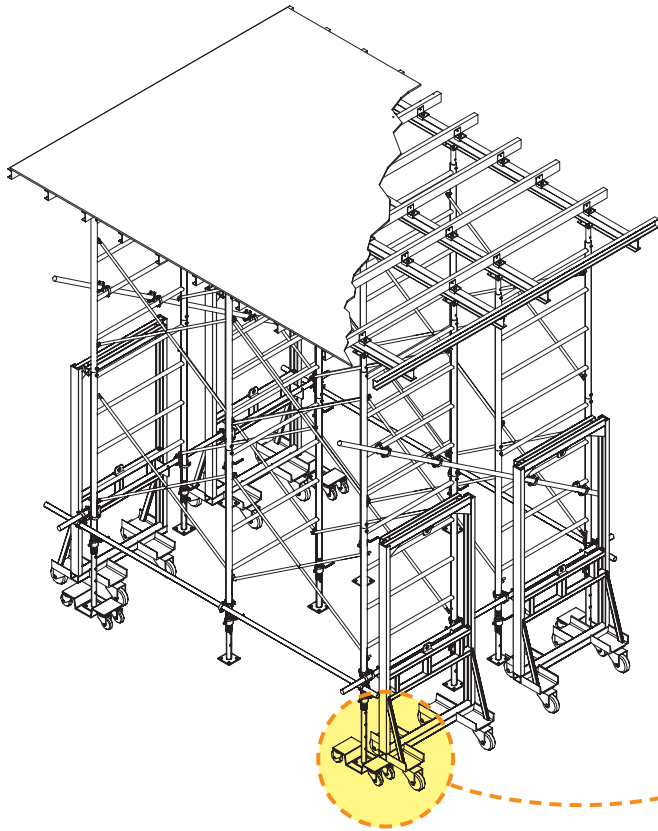

Insert 4 numbers of transport wheel (or 6 when required) underneath the main corner of tableform bottom prop inner. Lower the transporter which supports the tableform slowly.



STAGE - 2

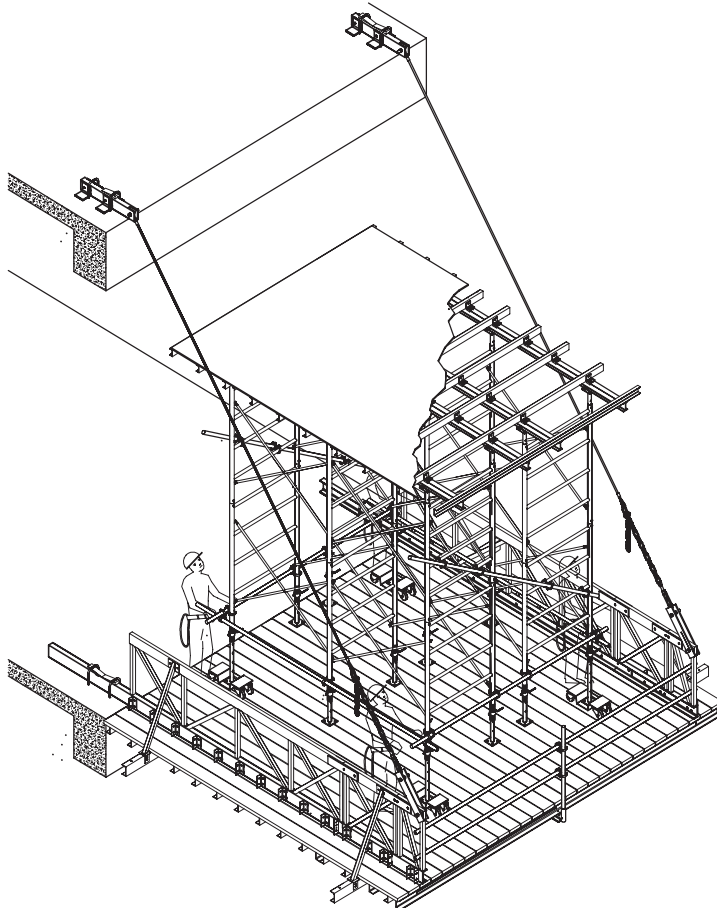


Once the tableform rests on the transport wheel, the tableform can be pushed into the loading platform.



STAGE - 4

HOISTING OF EDGE TABLEFORM BY LIFTING FORK

| Lifting fork type | L (mm) | W (mm) | H (mm) | SWL (mm) |
|-------------------|--------|--------|--------|----------|
| 3A | 3000 | 1680 | 2150 | 1.8 |
| 3B | 3300 | 1680 | 2150 | 1.5 |
| 3C | 4200 | 1680 | 2150 | 1.0 |
| 4A | 3000 | 2600 | 2150 | 1.5 |
| 4C | 4200 | 2600 | 2150 | 1.0 |

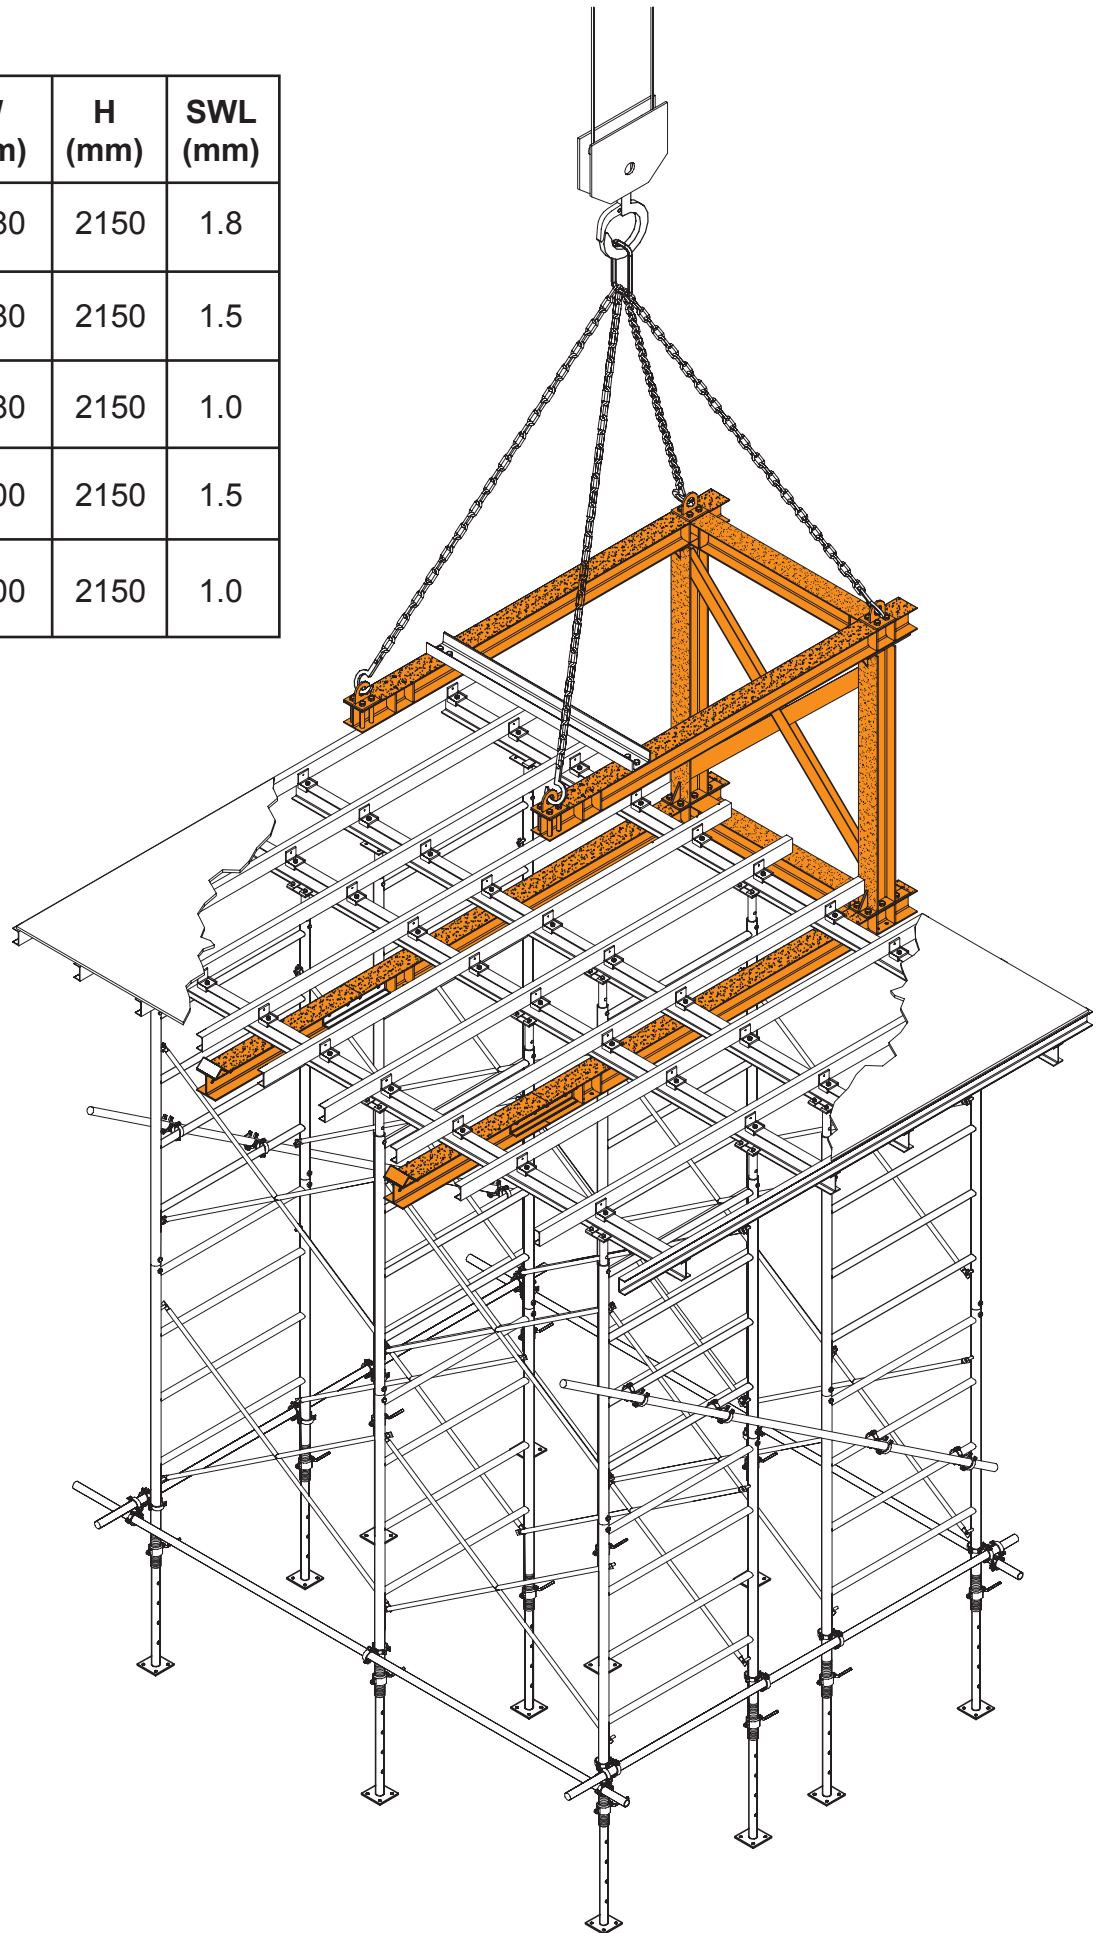

HOISTING OF TABLEFORM BY LOADING PLATFORM

